

About CHMER

Established in 1975, CHMER is the largest EDM manufacturer in Taiwan, exporting over 55 countries. Product lines include Die Sinking EDMs, Wire Cut EDMs, Small Hole Drilling EDMs, High Speed Milling Machines, and Laser Machines. A comprehensive technical support completes our services.

Environmental Requirements

1. Ideal temperature-controlled room: $23 \pm 0.5^{\circ}\text{C}$; Humidity: below 75% RH
2. Avoid placing the machine near vibrating sources or sources of impact energy, such as floors with heavy machinery
3. Avoid placing the machine under direct sunlight
4. Avoid placing the machine near heat processing equipment or magnetic fields, as the controller's sensitive electronic components may be affected
5. Avoid placing the machine in dusty environments, which may impact the machine structure and components

Space Requirements

Ensure sufficient space around the machine for maintenance access and operational movement.

Grounding Work

1. To prevent electromagnetic interference and leakage, follow Class 3 grounding regulations (ground resistance below 10Ω) as specified in the electrical equipment standards, and connect to other machines' grounding points
2. Use an independent grounding wire of 14 mm^2

Air Pressure Requirements

1. Only machines equipped with AWT (Auto Wire Threading) or immersion-type models require air pressure: 6 kg/cm^2



High Precision Linear Motor Drive Wire Cut EDM

INTELLIGENCE × FUTURE




NV Series Wire Cut EDM

WNV000Ev01



Shaping the Future of Smart Manufacturing

Smart Future



The NV Series is engineered to meet the highest demands in machining accuracy, speed, and performance, enabling a significant boost in productivity.

Its streamlined design combines simplicity with craftsmanship, with every detail reflecting a customer-oriented mindset to ensure perfection and deliver an exceptional user experience.

Choose the NV Series Wire Cut EDM and discover the perfect fusion of performance and design.



Machine Design

01 High Rigidity Structural Design

Featuring a trapezoidal base combined with a moving-type XY axis structure, the machine ensures a stable low center of gravity. The worktable maintains stability at any position, delivering outstanding machining stability and accuracy.

02 Extended Z-Axis Travel (Opt.)


For long workpieces or machining with an additional 6th-axis lower clamp, an extended Z-axis travel is available as an option to accommodate larger vertical space requirements.

03 Triple Guideway Design (NV643 Model)

The unique triple linear guideway structure ensures exceptional stability during saddle and upper frame movements, achieving superior machining stability and accuracy.

04 Automatic Rise-and-Fall Tank Door

With a simple press, the tank door automatically rises or lowers for quick access. The fully automated control ensures machining safety and greatly enhances work efficiency. The space-saving design also facilitates production line layout and machine arrangement.

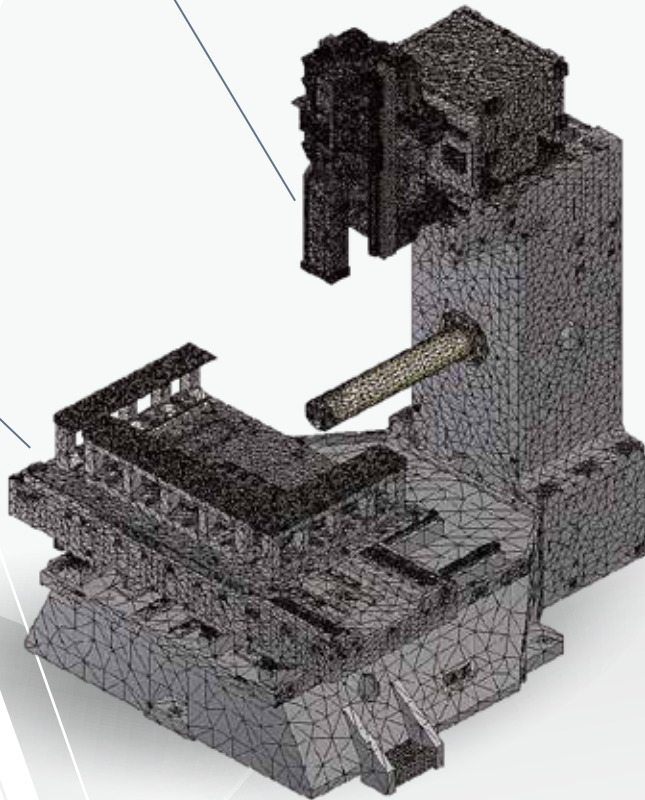

6th Gen AWT

5th vs. 6th Gen AWT System

Item	Unit	AWT 5.5	AWT 6th	Diff. %
Threading Time	sec	12	9	25%
Wire Cutting Time	sec	4.5	2.5	44%
Heater Lifetime	mth.	4	8	100%
Heater Power Consumption	W	5.5	4.5	18%
Circuit Board Count	pcs	7	5	28%
AWT System Power Usage	W	320	165	48%

Backed by years of automation experience, CHMER introduces the enhanced 6th Gen AWT system. It shortens wire threading and cutting time by over 20%, extends consumable lifespan by more than 100%, and reduces overall power consumption by 48%.

01 Intuitive Parameter Adjustment Interface

Offers 50 copper wire parameter sets. Simply select the suitable one for different wire brands and diameters to ensure excellent threading performance.

02 3999 Programmable Hole Machining Records

Capable of storing up to 3999 hole machining records for easy access to multi-hole data.

03 Break point Re-threading Function


After a cutting interruption, threading resumes at the break point for immediate machining—no need to return to the start, reducing idle travel time.

04 Auto Threading Assistant Device

Enhances threading success for high thickness through Auto Threading Assistant Device

Features

- ✓ The highly reliable mechanical design reduces maintenance costs, achieving an almost 100% wire threading success rate.
- ✓ Equipped with broken wire detection and submerged threading functions, it minimizes the time required for restarting from the cutting point, draining, and refilling. Based on machining conditions, it enables unmanned operation and smart manufacturing.
- ✓ The threading execution mode can be freely set, and with the automatic threading assistance device, threading thick workpieces is no longer a concern.
- ✓ With the integration of automatic water level control, multiple uneven height machining tasks can also be fully automated.

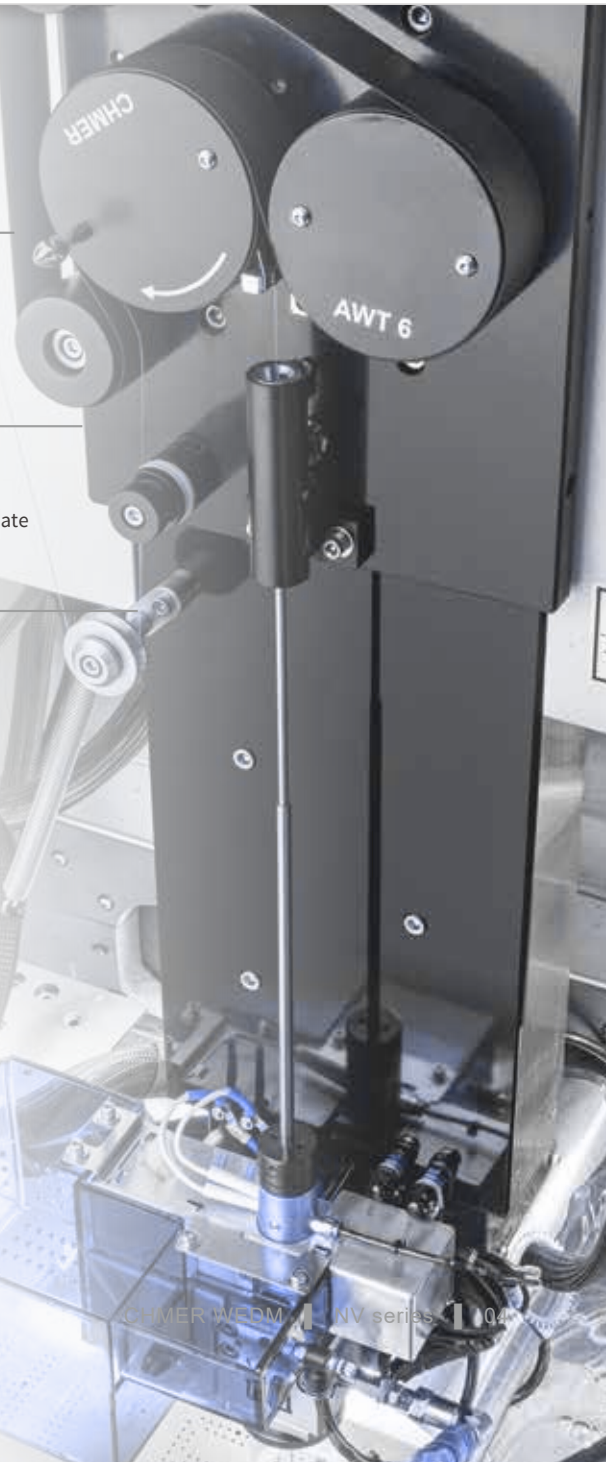

Linear Motor

- ☞ All models are equipped with CHMER's UX1 linear motor drive system, delivering stronger thrust with lower energy consumption to ensure stable and accurate movement every time.
- It features zero friction, no backlash, no transmission loss, no vibration, and excellent responsiveness.

UX1 Linear Motor

Engineered with a dual-balance design, the scale delivers high thrust, low heat rise, and maintenance-free operation. Its structure remains completely unaffected by magnetic forces and distortion.

Integrated with the latest 24-bit high-performance drive, the linear motor achieves a threefold increase in response frequency. This ensures higher speed, superior responsiveness, precise positioning, exceptionally smooth stability, and accurate feedback.

It guarantees consistent stability and accuracy in every movement while reducing overall energy consumption.



Absolute Linear Scale

- 1 **Excellent Anti-Interference :**
Provides superior resistance to interference and contamination.
- 2 **No Reference Return Required :**
Eliminates the need to return to a reference point at every startup.
- 3 **High Accuracy :**
Delivers higher positioning detection accuracy, contributing to improved machining precision.




Reduction of the tolerance on shape accuracy

Especially at the intersection of straight line to curve

	Linear Motor		BallscREW	
	Section A	Section B	Section A	Section B
Top	5.999	3.999	5.999	3.998
Middle	6.000	3.998	5.998	3.995
Bottom	6.000	4.000	6.000	3.999
Tolerance	-0.001	-0.002	-0.002	-0.005


- 《Machining Conditions》
- Brass wire = 0.20 mm/BS
 - Workpiece=SKD11
 - Thickness=50 mm
 - Number of cuts=3

《Cutting Profile》


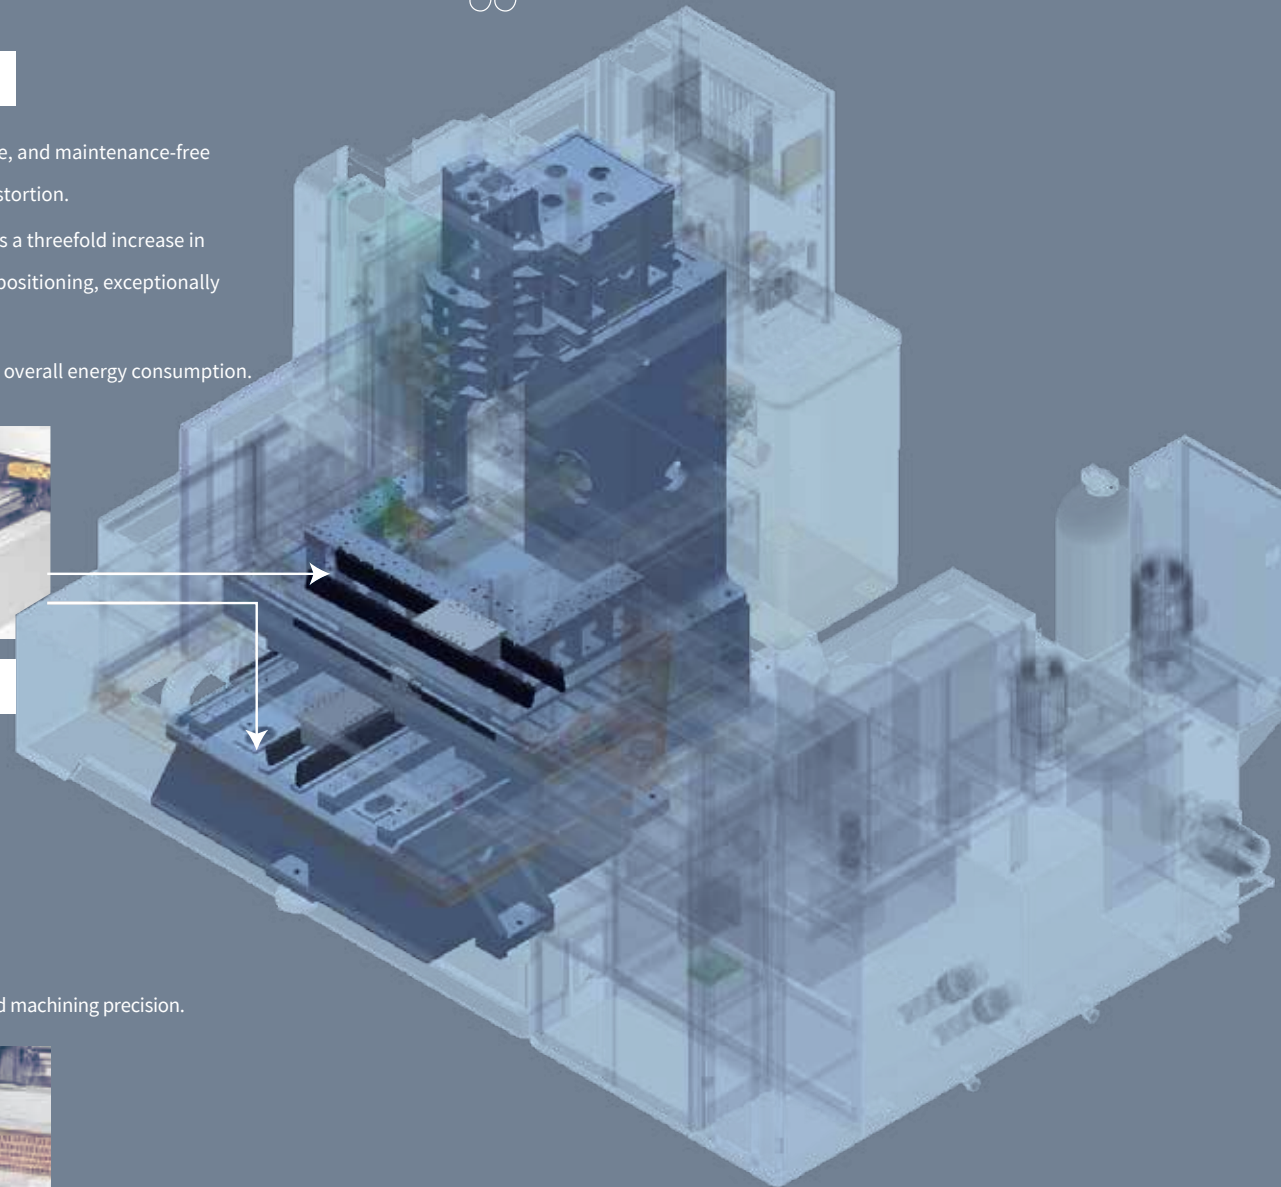


Ballbar Testing

After 5 Years of Use

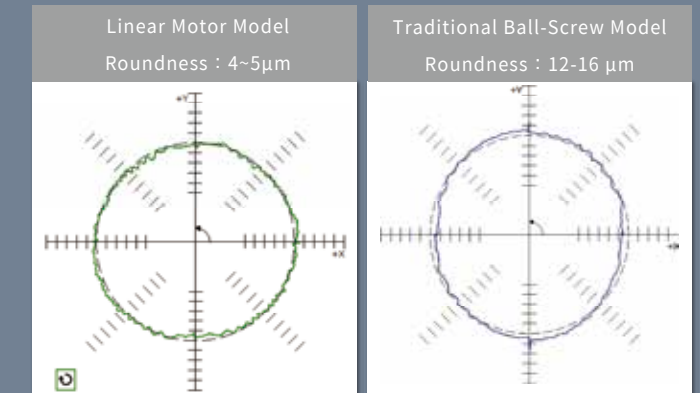

Linear Motor Achieves Superior Accuracy in Corner Transitions

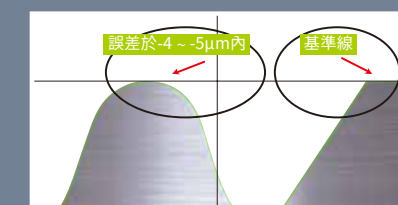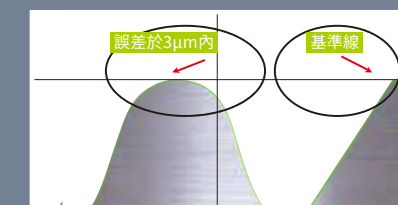

Enhanced Surface Accuracy



- Brass wire = 0.20 mm/BS
- Number of cuts = 5
- Surface roughness = Ra 0.25 μm
- Workpiece = SKD11
- Thickness = 25 mm

☞ When equipped with the optional AC-μ Super Fine Finish Circuit, the linear motor system significantly enhances finishing speed, surface uniformity, and detailing. With speed deviation under 10%, it achieves superior surface finishes beyond the capabilities of traditional ballscrew systems.



The intelligent i8+ power system boosts cutting speed by 15% while achieving 28% energy savings. It also features automatic discharge path optimization to enhance machining stability and reduce power loss.

**15%
CUTTING
SPEED**

**ENERGY
SAVING
28%**



i8+ Power Supply

01 Discharge Control System

The system uses an embedded current-reducing control architecture and ASIC chips to improve discharge efficiency. It monitors the gap in real time, effectively suppresses arc discharge, and stabilizes the cutting conditions, resulting in up to 15% faster cutting speed.

02 Energy Recycling Technology Next-Generation

The new i8+ power system uses advanced energy-saving circuitry to recycle regenerative energy from submersible motors back into the power source, achieving up to 28% energy savings. Excess energy is dissipated through sink resistors, reducing heat and ensuring stable, efficient operation.

03 IVC High-frequency Switching Inverter Power Supply



The upgraded IVC high-frequency switching inverter offers wide-range power output adjustment, allowing operators to fine-tune the discharge energy for better cutting performance and system safety.


It also adopts advanced filtering technology to reduce external interference and output more accurate energy pulses, ensuring precise discharge judgment and stable cutting performance.

High-efficiency Energy Management System

The NV Series integrates advanced power and water conservation technologies, slashing total energy consumption by up to 40%. Specifically, power usage is reduced by 28%, while the water system achieves savings of up to 45%.


A built-in regeneration circuit recovers and recycles energy for reuse, achieving true energy recirculation. Furthermore, the use of IE3-grade variable frequency motors intelligently matches output to machining loads, ensuring maximum efficiency, superior stability, and significant energy savings.

01 Power Efficiency Comparison



02 Standby Power Saving Comparison

Note:
Under water tank power-on standby mode

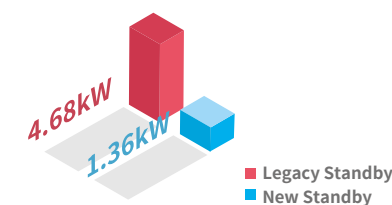

71%
Water tank standby power cut by 71%.



45%
Inverter chiller power use reduced by 45%.



40%
Machining power cut by 40% vs. previous generation.



28%
Upgraded circuits lower power cabinet use by 28%.



03 Eco Cut

Built-in Eco Cut mode reduces copper wire consumption by 42%.



04 Energy-saving Inverter Chiller

Equipped with automatic temperature detection and intelligent inverter control, the chiller improves cooling efficiency and maintains precise water temperature within $\pm 0.5^\circ$. It ensures stable, high-accuracy machining while reducing power consumption by 45% compared with standard chillers.




05 Sleep Mode & Wake-up

Allows you to pre-set daily wake-up times for the equipment, enabling it to start up and execute production tasks immediately.

Precision Performance


High Accuracy + High Repeatability = High Stability

- Workpiece : SKD11
- Thickness : 20.0mm
- Wire Diameter : 0.25mm(Standard Brass Wire)
- Number of cuts : 3passes (1 rough cut + 2 skim cuts)
- Ambient Temperature : 23°C±0.5°C

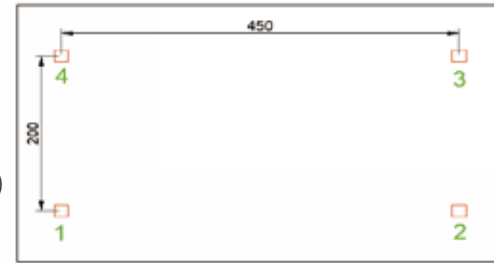


Positioning Accuracy – Pitch (mm)					Shape Accuracy – Cutting Shape (mm)			
Coordinate			Measured Deviation		Measured Deviation			
NO	X	Y	X	Y	NO	Square Hole	X	Y
1	0.00	0.00	0.0000	0.0000	1	8 x 8	0.0010	0.0008
2	450.00	0.00	-0.0018	-0.0001	2	8 x 8	0.0013	0.0010
3	450.00	200.00	-0.0022	0.0014	3	8 x 8	0.0012	0.0009
4	0.00	200.00	-0.0007	-0.0002	4	8 x 8	0.0008	0.0007
Min. Deviation mm			-0.0007	-0.0001	Min. Deviation mm		0.0008	0.0007
Max. Deviation mm			0.0022	0.0014	Max. Deviation mm		0.0013	0.0010


X-Axis Pitch Accuracy

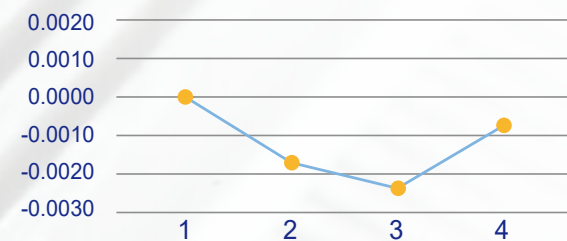


Y-Axis Pitch Accuracy

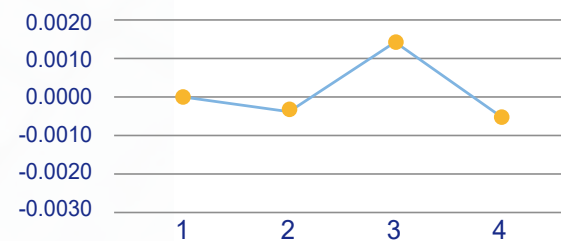

X-Axis Square Hole Accuracy

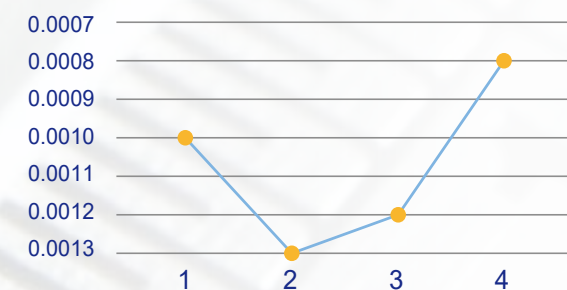

Y-Axis Square Hole Accuracy

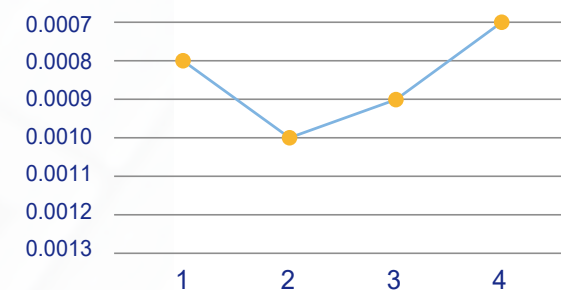

Roundness

- Diameter : 10.0017
- X : 0.0000
- Y : -0.0010
- Min [12] : -0.0008
- Max [27] : 0.0009
- Range : 0.0017
- Points : 32
- Magnification : 595
- Reference : 3



AC - μ Super Fine Finish Circuit (Opt.)

AC-μ Super Fine Finish Circuit enables high-frequency discharge and precise energy control for superior surface quality :

- Best surface roughness: Ra 0.09μm (Tungsten Carbide)
- Best surface roughness: Ra 0.12 μm (SKD11 Steel)



Material: SKD11 Wire Ø 0.20 mm Thickness: 50 mm							
Passes		6	5	4	3	2	1
Surface Roughness (μm)	Ra	0.12	0.20	0.28	0.62	2.0	2.4
	Ry	1.1	1.7	2.5	5.0	13.3	14.3



Material: Tungsten Carbide Wire Ø 0.10 mm Thickness: 20 mm								
Passes		7	6	5	4	3	2	1
Surface Roughness (µm)	Ra	0.09	0.11	0.14	0.20	0.45	1.42	2.0
	Ry	0.8	1.0	1.2	1.6	3.3	10.2	13.0

01

AC/DC Power Supply

Designed for special metals such as titanium alloy and tungsten carbide, it suppresses electrolytic corrosion and oxidation during machining.





02

Corner Control Function

The unique corner control function enables precise machining of sharp corners with superior accuracy. Conditions :

- Workpiece Material: SKD11
- Wire Diameter: Ø 0.20mm
- Number of Cuts: 1
- Magnification: 150× Optical Projector



03

Electrode Wire Optimization

Equipped with the latest electrode wire design, the system optimizes current density distribution. With intelligent anti-wire breakage control, it quickly and precisely eliminates abnormal discharges, significantly improving machining stability and accuracy.



Intelligent Power Master

AI-Powered CNC Wire Cut EDM




01

Intelligent Stepped Control (ISC) Power Supply (Opt.)

Through monitoring discharge waves, ISC can provide precise discharge control for stepped workpieces. It effectively prevents wire breakage, reduces wire marks, ensures high-speed and stable machining, and delivers high-quality finished parts.


Conditions: ■ Workpiece: SKD11 ■ Wire diameter: Ø0.25 mm

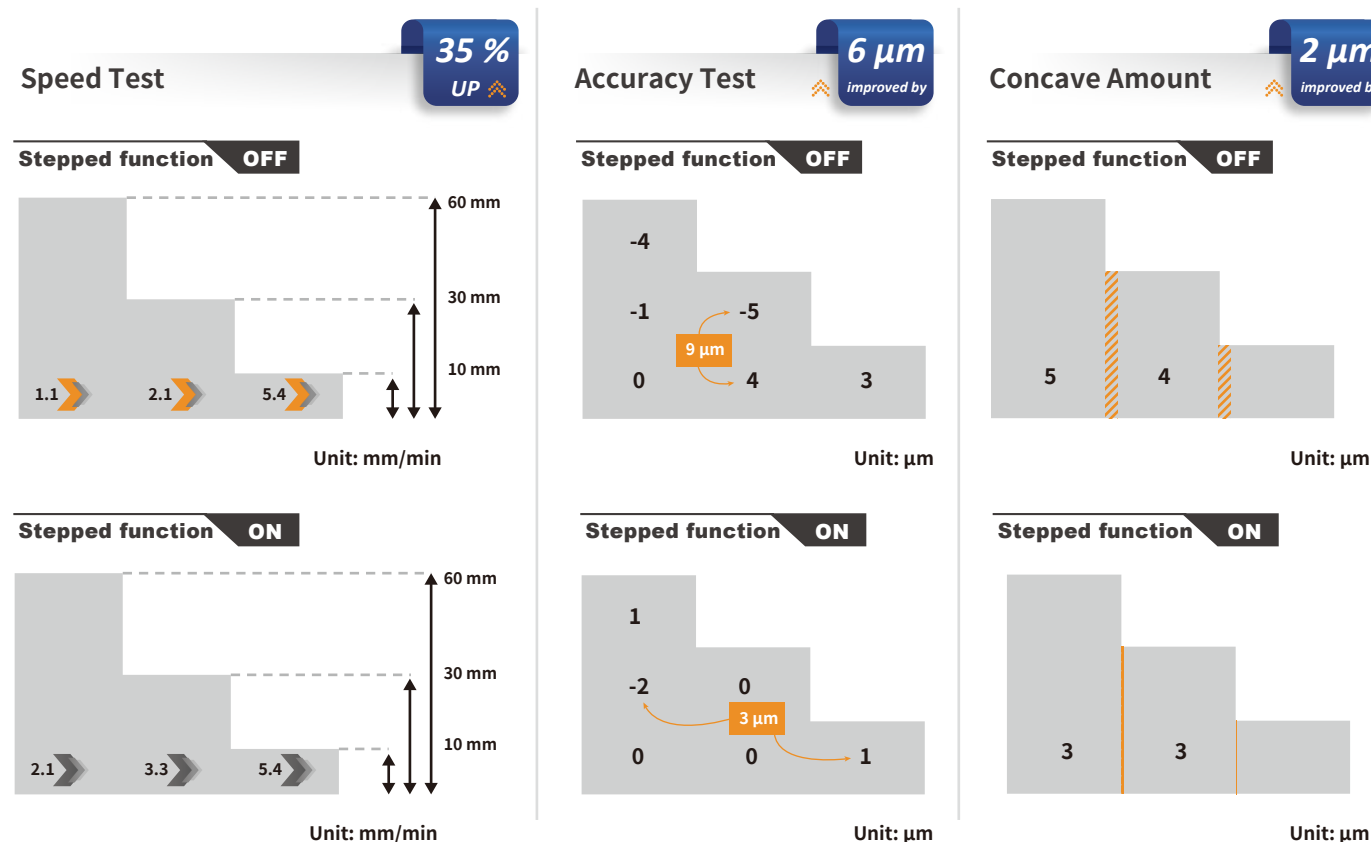

02

Corner Control


Integrating advanced AI technology, the system precisely predicts and dynamically adjusts cutting paths, achieving exceptional corner control with unmatched accuracy and surface finish. This technology significantly enhances machining efficiency and yield, meeting the rigorous quality demands of high-precision manufacturing.



03

Intelligent Discharge Tracking


By integrating AI technology with real-time control, the system precisely monitors and adjusts discharge parameters on the fly. It effectively suppresses wire breakage while ensuring stable, efficient machining and consistent product quality.



04

Intelligent Measurement

Powered by AI technology, the system precisely detects machining areas through probe or wire discharge sensing, automatically defining final machining dimensions. It retrieves optimized parameters from the machining database, enabling rapid setup and highly efficient machining.



05

SAC – Super Hard Alloy Circuit


Designed for machining super hard alloy materials.

Tungsten Carbide	Nickel-Based Alloy	Cobalt-Based Alloy	Iron-Based Alloy	Titanium Alloy	Pure Tungsten
------------------	--------------------	--------------------	------------------	----------------	---------------

06

POS – Plane Offset System (Optional)


Uses a probe to measure the workpiece surface and compensates offset data to generate a true vertical plane.



07

QMC – Surface Quality Master Circuit

Reduces wire marks at the entry and exit points on flat and circular surfaces, ensuring smoother finishes and superior surface quality.

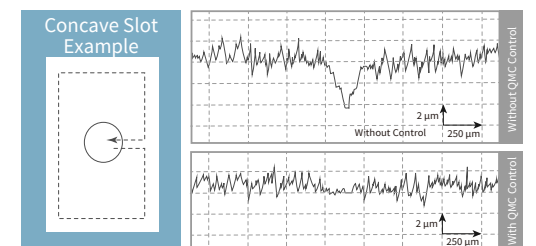

08

Taper Compensation System

Allows real-time taper compensation during machining and adjustment to any required angle.

In-House Controller

Features of the W5N Control System

The W5N GenOS controller integrates a Linux-based high-performance system with industrial PC technology, boosting computing power by over 15 times and supporting multi-axis synchronous control.

It features Database, FTP server, OPC UA server, and remote desktop functions for seamless data collection, remote monitoring, and MES system integration.

The modular hardware design improves maintenance convenience, enables quick upgrades, and facilitates efficient external device integration, ensuring long-term operational stability.




Intuitive Operation Interface

Simple and clear touch interface with guided navigation, allowing new users to operate quickly.



Preloaded Hole Machining Data

Stores up to 3,999 sets of machining data, with access to multiple hole-cutting parameters.



CAD/CAM Software (Opt.)

Supports 2D/3D graphics input, enabling direct toolpath conversion without additional processing steps for seamless execution.

01 Linux-Based OS

Independently developed Linux-based technology ensures high availability, stability, and reliability. It flexibly meets various operational needs without concerns about viruses or software licensing issues, delivering optimal performance across different applications.

02 Digital Water Pressure Adjustment

The digital water pressure system features automatic adjustment, allowing precise pressure and flow rate control based on actual machining needs, ensuring process stability.

03 QR Code Program Input (Opt.)

Utilizes QR code scanning for quick input of program calls and machining parameters, streamlining pre-processing setup while reducing manual input time and error rates.

04 EtherCAT Communication

Combining EtherCAT automation with GenOS enables high-speed response and scalability, meeting multi-axis synchronized motion control needs. Supports up to 7-axis EtherCAT communication and discharge modules, boosting computing performance 15×.

05 Temperature Monitoring (Opt.)

Integrated temperature sensors and control system monitor equipment operating temperatures in real time. Data collected by sensors provides instant temperature feedback, enabling thermal compensation to maintain optimal operating conditions. Supports preventive maintenance strategies to enhance efficiency and stability.

06 Enhanced Performance

From graphical data loading to pre-machining simulation, the controller's computation time has improved 15× compared to the previous generation.

New vs. Old Controller Comparison

Item	Unit	F-Type	N-Type	Difference
Computing Performance	FLOPs	806	12135	↑ 15×
Size	LxHxW cm	28.5x20.5x30.5	19.4x14.8x6	↓ 90%
Weight	kg	9.05	1	↓ 90%
Power Consumption	W	44	13.44	↓ 70%
Component Count	pcs	159	12	↓ 92%
Overall Assembly Size	kg	105	84	↓ 20%
100MB File Loading Speed	s	31.8/36.5	2.9/2.7	↑ 12×



Mobile Technology and Optimal Intelligence (Opt.)

Without standing in front of the machine, the all new “Remote monitoring & IoT” can connect to the Cloud through various mobile devices.

The intelligent Cloud function creates a perfect mobile management platform and gives you a foreseeable future and a new era of intelligent machinery.

With the core technology of intelligent information management center, the IoT can collect the data and history of every machine, for instance, the relation between power, temperature, and time, and can observe the characteristic data by time. The customer can own a database of big data.

Under the intelligent information management center, we develop two kinds of software service platform for easy and convenient management system, including

- Mobile Data Platform
- iConnected Information Management Center

You can choose the suitable platform among different service platforms.

Information Management Center - Features



Data Visualization

Real-time machine data is displayed, retrieved from the machine's database, and converted into pie charts and line graphs, using data visualization for production line analysis.



Active Push Notifications

CHMER's smart push notification system is perfectly integrated with the alarm system, allowing you to monitor machine status anytime, anywhere.

Whether dining, resting, socializing, or on vacation, you will receive notifications instantly on your phone or tablet.

In the Industry 4.0 era, this system significantly shortens problem response time, reduces cost losses, minimizes manpower for on-site monitoring, and enhances overall operational efficiency.

Information Management Center - Includes

01



Mobile Data Platform

Offers mobile management capabilities, allowing instant access to various machine information, such as machine status, uptime, consumable life management, and real-time machining monitoring, through phones or tablets.

02




Intelligent Information Management Center

Stores large amounts of machine data every second, viewable through historical data query pages, allowing the resolution of the following issues:


- a. Understanding machine uptime (critical for customers)
- b. Knowing consumable usage (helps customers know when to replace consumables)
- c. Conducting detailed analysis of machine operation (retrieve alarms during specific timeframes, and know the machine's status at the time to further analyze)



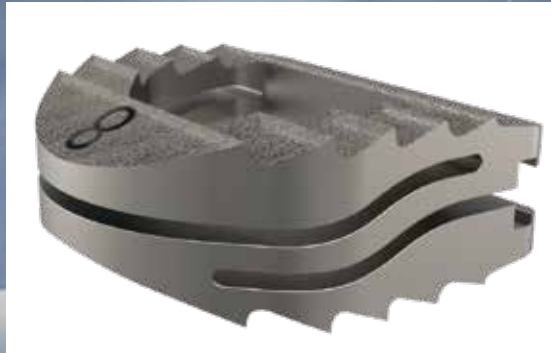


MEDICAL INDUSTRY

Lumbar Intervertebral Cage

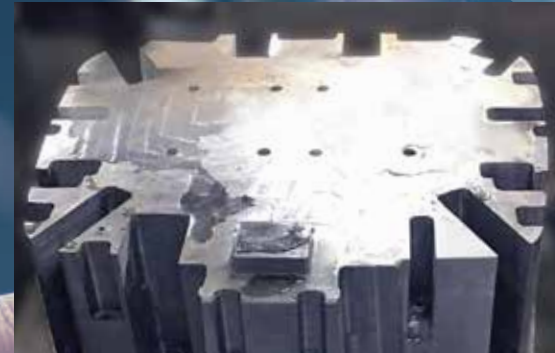

AUTOMOTIVE INDUSTRY

Transmission System Mold

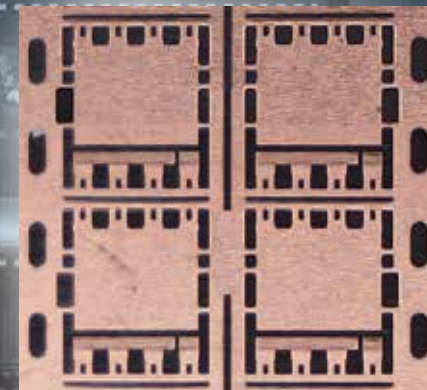

ELECTRONICS INDUSTRY

Precision Connector Stamping Molds



ICT INDUSTRY

Precision Connector Stamping Molds

Standard/Optional

Standard ● Optional ○ Not Available —

Features & Item	Specification	Unit	NV432L	NV643L
Power Supply & Control System				
i8+ Power Supply		1 set	●	●
AC/DC Power		1 set	●	●
ISC (Intelligent Stepless Control Power)		1 set	○	○
AC-μ(Super Fine Finish Circuit)		1 set	●	●
Touch Screen	24"	1 set	●	●
Interrupted Power Recovery		1 set	●	●
USB		1 set	●	●
Internet Data Transfer		1 set	●	●
DXF Transferring Function		1 set	●	●
Remote Monitoring & Internet Connection		1 set	○	○
Mechanism & Machining System				
UX1 Linear Motor Drive System	CHMER X & Y Axes	1 set	●	●
Absolute Linear Scale	0.1 μm resolution	1 set	●	●
Automatic Wire Threading System	AWT 6.0	1 set	●	●
Wire Diameter Machining	Ø 0.15~0.30 mm	1 set	●	●
Fine Wire Specification	Ø 0.1 mm	1 set	○	○
Wire Threading Assistant Device		1 set	●	●
Z-Axis Travel Extension-300mm		1 set	○	-
Z-Axis Travel Extension-400mm		1 set	-	○
Automatic Rise-and-Fall Door		1 set	●	●
Automated Adding Water Function	IWA	1 set	-	-
Intelligent Water Level Control System	IWA	1 set	●	●
Energy Saving Inverter Chiller	20000 BTU	1 set	●	●
Additional Functions				
Temperature Monitoring Device		5 set	●	●
Digital Water Pressure Adjustment		1 set	●	●
6th Axis Machining		1 set	○	○
Jumbo Wire Feeder	30 kg	1 set	○	○
Auto Wire Chopper	Ø ≤ 0.1 mm Not Usable	1 set	○	○
2 in 1 Transformer and AVR		1 set	○	○
Waste Adhesion Prevention		1 set	●	●
Sleep Mode & Wake-up		1 set	●	●
Wire Overflow Protection		1 set	●	●
QR Code Program Input		1 set	●	●
Taper Compensation System		1 set	●	●
Flatness Compensation System		1 set	○	○
QMC-Surface Quality Control Circuit		1 set	●	●
CAD/CAM		1 set	○	○



5 Year Warranty
Linear Motors



10 Year
Accuracy Guarantee

Standard/Optional Features



Patented Automatic Rise and Fall Front Door

Best protection and automatically rise and fall door to match the loading and unloading workpiece by automation



Energy-Saving Inverter Chiller

Autonomous temperature detection, smart variable frequency, and fast cooling precisely control water temperature to ±0.5°C, ensuring stable processing with 45% lower power consumption than standard chillers.




DXF Transferring Function

CHMER self-developed software can convert drawing to program



Sleep Mode & Wake-up

Allows you to pre-set daily wake-up times for the equipment, enabling it to start up and execute production tasks immediately.

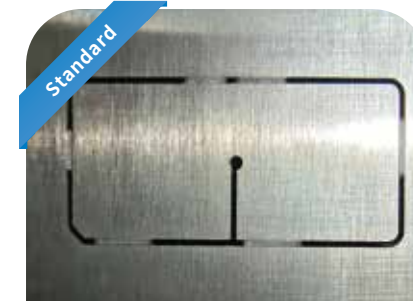

Waste Adhesion Prevention

Optional welding helps prevent dross from affecting machining. Residual dross is removed post-processing, improving equipment utilization.



The 6th Axis

Equipped with IP68 protection, the 6th-axis supports underwater 3D machining, enabling complex surfaces and rotational angles for broader applications and greater added value.



Jumbo Wire Feeder

30 kg wire spool provides long time cutting for unmanned operation



Plane Offset system

Equipped with a probe measurement system, POS compensates for deviation and converts it into a true vertical plane after calculation.



Auto Wire Chopper



The wire cutting device cuts waste wire into sections, increasing waste box space utilization by over 100% compared to traditional methods where wire is wound in a continuous coil.

Standard Specifications


Model		NV432L	NV643L	
X, Y, Z Travel	mm	400 x 300 x 250	600 x 400 x 300	
U, V Travel	mm	100 x 100	120 x 120	
Max. Workpiece Size	mm	725 x 600 x 245 (Submerged)	900 x 700 x 305 (Submerged)	
Max. Workpiece Weight	kg	500	800	
X, Y Feedrate	mm/min	1,800	1,800	
Axis Drive System		XY Axes Linear Motor Drive/ UVZ Axes AC Servo Motor Drive		
Wire Diameter (Standard)	mm	Ø 0.15 ~ 0.3 (Ø 0.25)		
Wire Tension	gf	300 ~ 2,500		
Max. Wire Feeding Speed	mm/sec	300		
Wire Feeder Load Capacity	kg	≤ 8 kg		
Max. Cutting Taper	mm	± 21°/110(Wide Angle Nozzle · DA+DB=15 mm	± 21°/140(Wide Angle Nozzle · DA+DB=15 mm	
Machine Dimension (WxDxH)	mm	2680 x 2264 x 2330	3060 x 2560 x 2414	
Net Weight	kg	3200	4100	
Dielectric Filtration System				
Dielectric Capacity	L	1250	1,250	
Filter		Paper	Paper	
Ion Exchange Resin Filter	L	20	20	
Water Quality Control		Auto	Auto	
Water Temperature Control		Auto	Auto	
Power Supply Unit				
Circuit Type		Transistor, No Resistance Loop		
Discharge Mode		Rough Machining / Fine Machining / AC-μ Super Fine Finish		
Discharge Voltage Levels		16 (Standard) / 20 (Optional)		
Discharge Time Levels		60		
Pause Time Levels		233		
CNC Unit				
Controller Version	N-Type Controller		Compensation Functions	Linear / Circular
Operating System	GenOS (LINUX)		Position Command	Absolute / Incremental
Processor	32 bit		Command Unit	Metric / Inch
CPU Core Count	Quad-core		Machining Speed Control	Servo / Fixed
RAM	4GB		Interpolation Rate	0.001–9,999.999
Storage	32 GB		Program Storage Capacity	1,000–9,999
Display	24" Color Touch Screen		Power Input	3 Phase 220V ± 5%
Servo Control	EtherCAT – Semi-closed Loop, Fully-closed Loop (Optical Encoder)		Max Input Power	8 kVA
Controlled Axes	5 / 7 Axes: X, Y, U, V, Z (Optional Rotary Axis)		Input Method	Keyboard, RS232C, RS422, RS485, USB, LAN
Resolution Unit	0.0001 mm			
Max Display Value	±9,999.9999 mm			

Floor Layout



NV432L

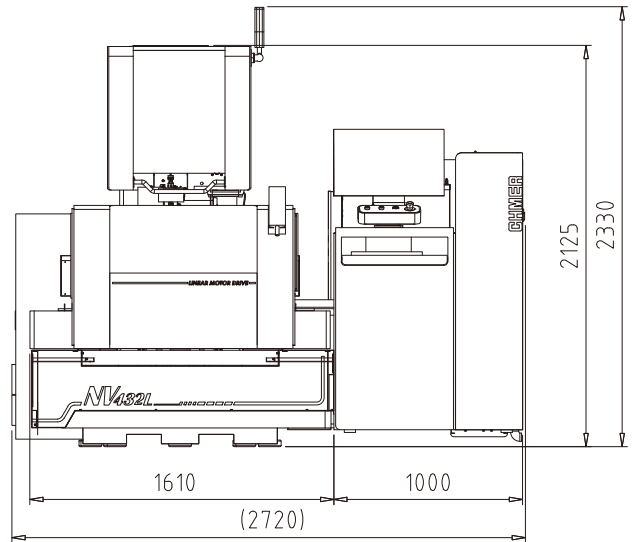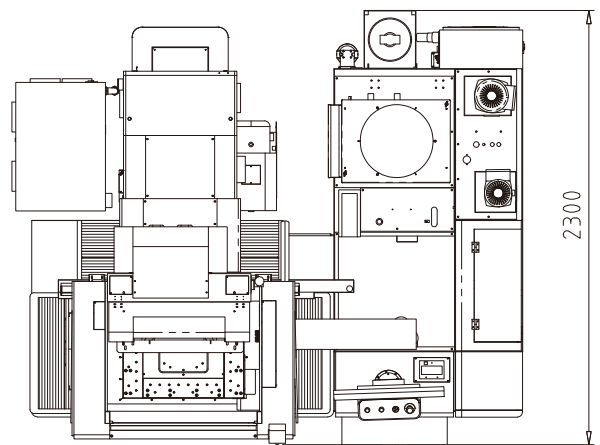


Worktable Hole Layout

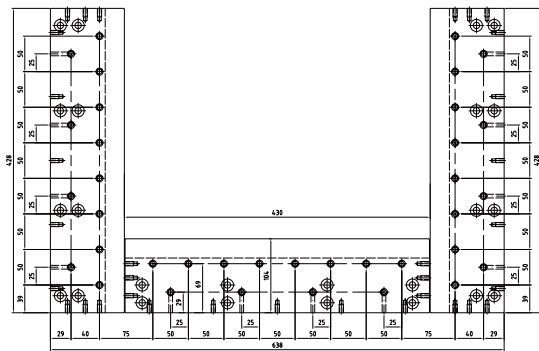

NV643L

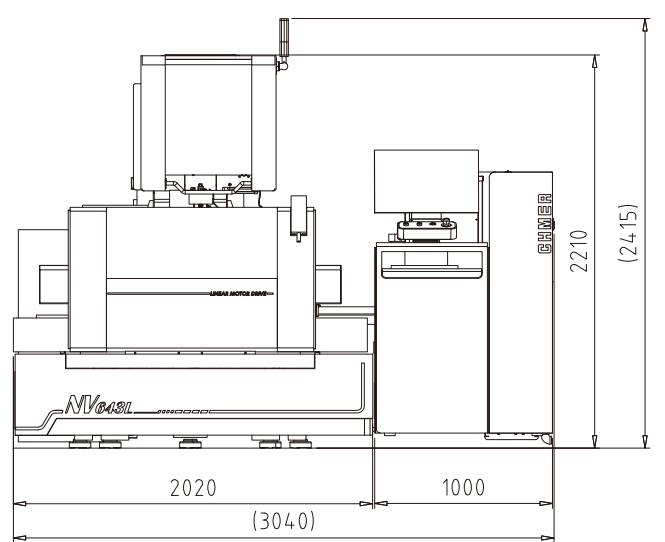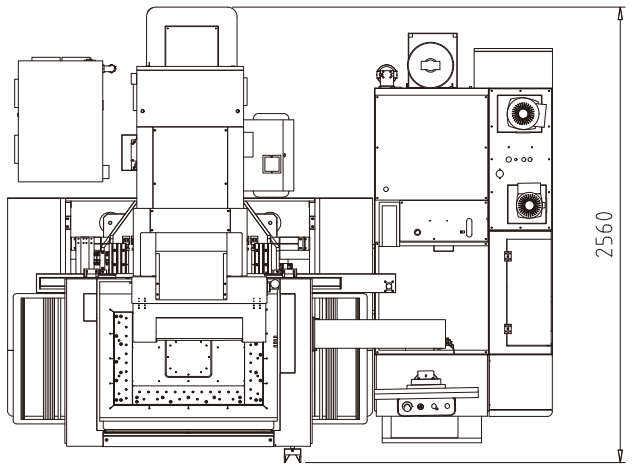

Worktable Hole Layout

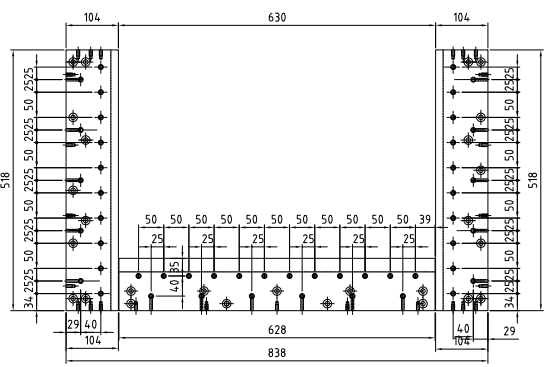

※Due to continuous improvements, the design and specifications are subject to change without prior notice.